

FICHA TECNICA

STED075

Archivo 109 de 170

IDENTIFICACION VERIFICADA

CODIGO SOLICITADO	STED075
FABRICANTE TECNICO	ABB Installation Products / T&B Fittings
FAMILIA	Star Teck Extreme Direct cable fitting, STED series
REFERENCIA LOCALIZADA	STED075

FUENTE DOCUMENTAL

DOCUMENTO OFICIAL	STED075 Technical Data / Specification Sheet
PAGINA(S) ANEXADA(S)	1, 2
ENLACE DE ORIGEN	https://cdn.gescan.com/PIM_Docs/Docs/STEP_ASSETS_PDF/174198342.pdf

ALCANCE DEL ARCHIVO

La(s) pagina(s) siguiente(s) provienen de la documentacion tecnica indicada y contienen la tabla, dimensiones, materiales, certificaciones o notas de aplicacion asociadas al codigo. Esta portada individual permite identificar el producto y mantener el nombre exacto requerido para la carga masiva.

Star Teck Extreme Director (STED) Teck cable fittings

- 01 Install fitting into enclosure
- 02 Insert cable and tighten (as usual)
- 03 Rotate fitting to desired angle



—
01



—
02




—
03

Warning:

Always ensure that the system is de-energized before performing any installation.

Star Teck Extreme Director (STED) Teck cable fittings

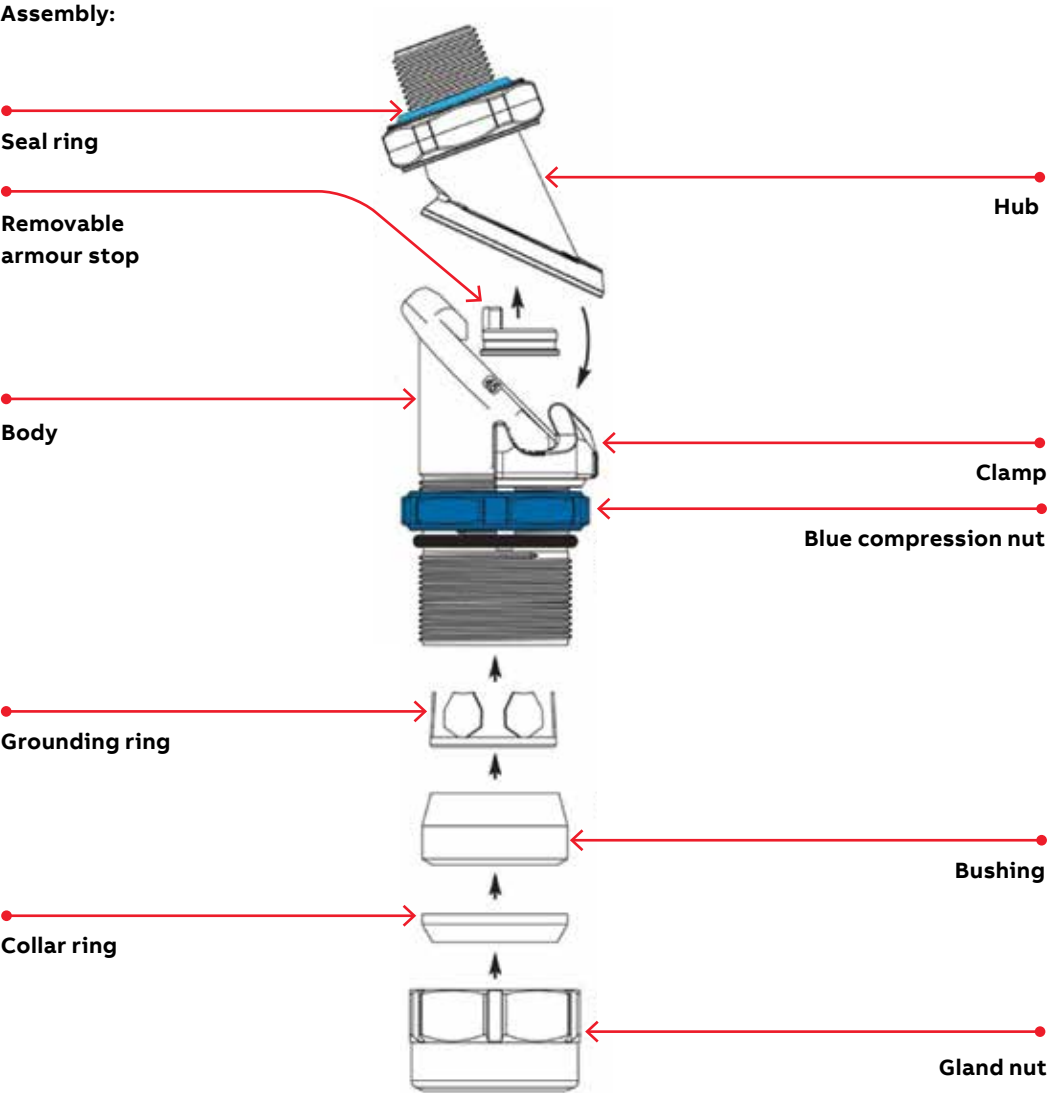

Cat. no.	Hub size (in.)	Gland torque (lb.-in.)	Range over jacket (in.)		Range over armour (in.)		Throat dia. (min. in.)		Overall (in.)
			min.	max.	min.	min.	With armour stop	Without armour stop	
STED050	1/2	450	0.600	0.885	0.520	0.795	0.505	0.617	5.375
STED075	3/4	600	0.860	1.205	0.780	1.125	0.645	0.819	5.875

Specifications: Type HLA. CSA Certified Class I, Division 2; Class II, Groups E, F and G, Class III Enclosure Types 4, 4X; Ex e II, IP66.
Type 6 UL listed.
For use with jacketed Teck cable, jacketed corrugated metal-clad cable (ACWU) or metal-clad cable (MC).
Aluminum or steel armour.