

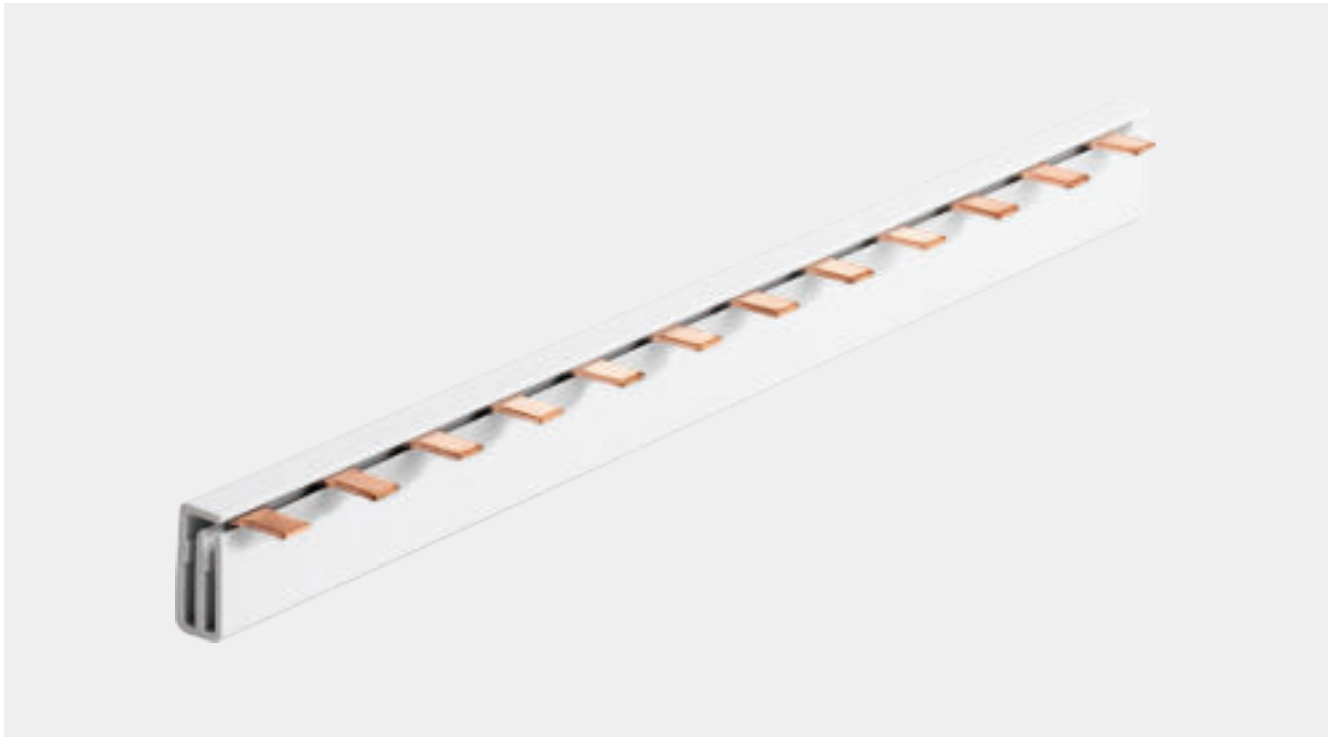


Pin type, 2-phase closed busbars

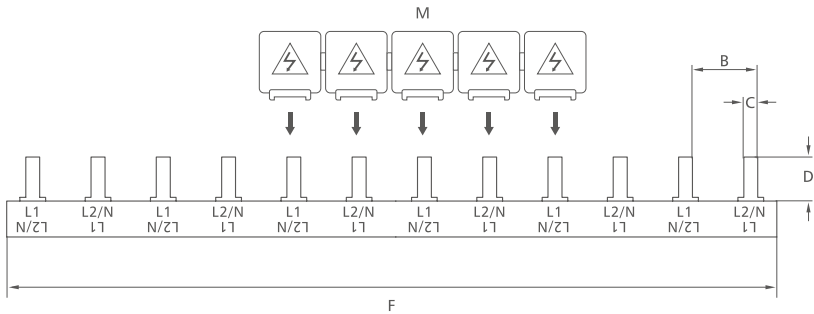

Description	Article No.	A Cross Section	B Distance (mm)	C Width of Pin(mm)	D Length of Pin(mm)	E Modules	F Length (mm)	G Reference Current
P-2L-210/8D	KP021208D	8mm ²	17.8	4	11.5	12	210	50A
P-2L-210/10D	KP021210D	10mm ²	17.8	4	11.5	12	210	63A
P-2L-210/13D	KP021213D	13mm ²	17.8	4	11.5	12	210	70A
P-2L-210/16D	KP021216D	16mm ²	17.8	4	11.5	12	210	80A
P-2L-1000/8D	KP025408D	8mm ²	17.8	4	11.5	54	1000	50A
P-2L-1000/10D	KP025410D	10mm ²	17.8	4	11.5	54	1000	63A
P-2L-1000/13D	KP025413D	13mm ²	17.8	4	11.5	54	1000	70A
P-2L-1000/16D	KP025416D	16mm ²	17.8	4	11.5	54	1000	80A
P-2L-1016/8D	KP025608D	8mm ²	17.8	4	11.5	56	1016	50A
P-2L-1016/10D	KP025610D	10mm ²	17.8	4	11.5	56	1016	63A
P-2L-1016/13D	KP025613D	13mm ²	17.8	4	11.5	56	1016	70A
P-2L-1016/16D	KP025616D	16mm ²	17.8	4	11.5	56	1016	80A



Busbar Series