


Pin type, 3-phase closed busbars



Description	Article No.	A Cross Section	B Distance (mm)	C Width of Pin(mm)	D Length of Pin(mm)	E Modules	F Length (mm)	G Reference Current
P-3L-210/8D	KP031208D	8mm ²	17.8	4	11.5	12	210	50A
P-3L-210/10D	KP031210D	10mm ²	17.8	4	11.5	12	210	63A
P-3L-210/13D	KP031213D	13mm ²	17.8	4	11.5	12	210	70A
P-3L-210/16D	KP031216D	16mm ²	17.8	4	11.5	12	210	80A
P-3L-1000/8D	KP035408D	8mm ²	17.8	4	11.5	54	1000	50A
P-3L-1000/10D	KP035410D	10mm ²	17.8	4	11.5	54	1000	63A
P-3L-1000/13D	KP035413D	13mm ²	17.8	4	11.5	54	1000	70A
P-3L-1000/16D	KP035416D	16mm ²	17.8	4	11.5	54	1000	80A
P-3L-1016/8D	KP035708D	8mm ²	17.8	4	11.5	57	1016	50A
P-3L-1016/10D	KP035710D	10mm ²	17.8	4	11.5	57	1016	63A
P-3L-1016/13D	KP035713D	13mm ²	17.8	4	11.5	57	1016	70A
P-3L-1016/16D	KP035716D	16mm ²	17.8	4	11.5	57	1016	80A

Busbar Series

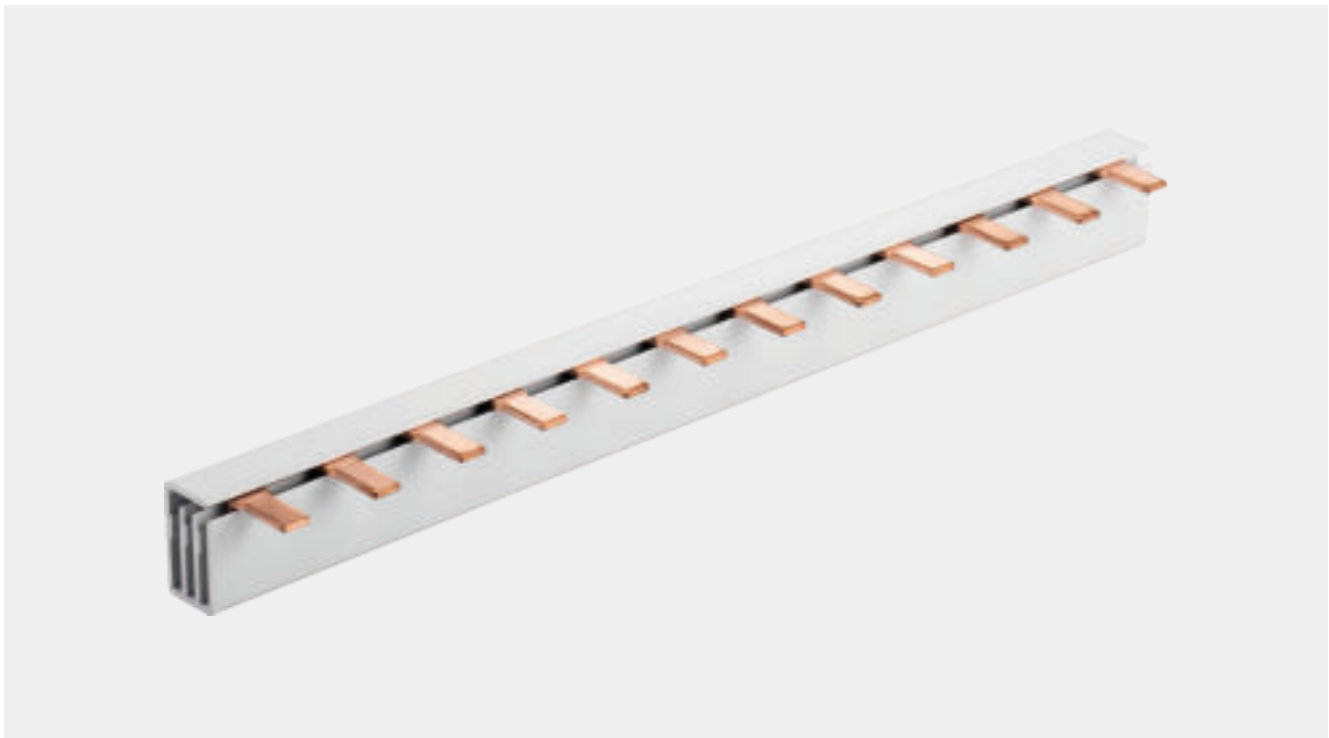